


205W-04013-ABC

water-cooled motor / generator with up to 12 kW continuous power

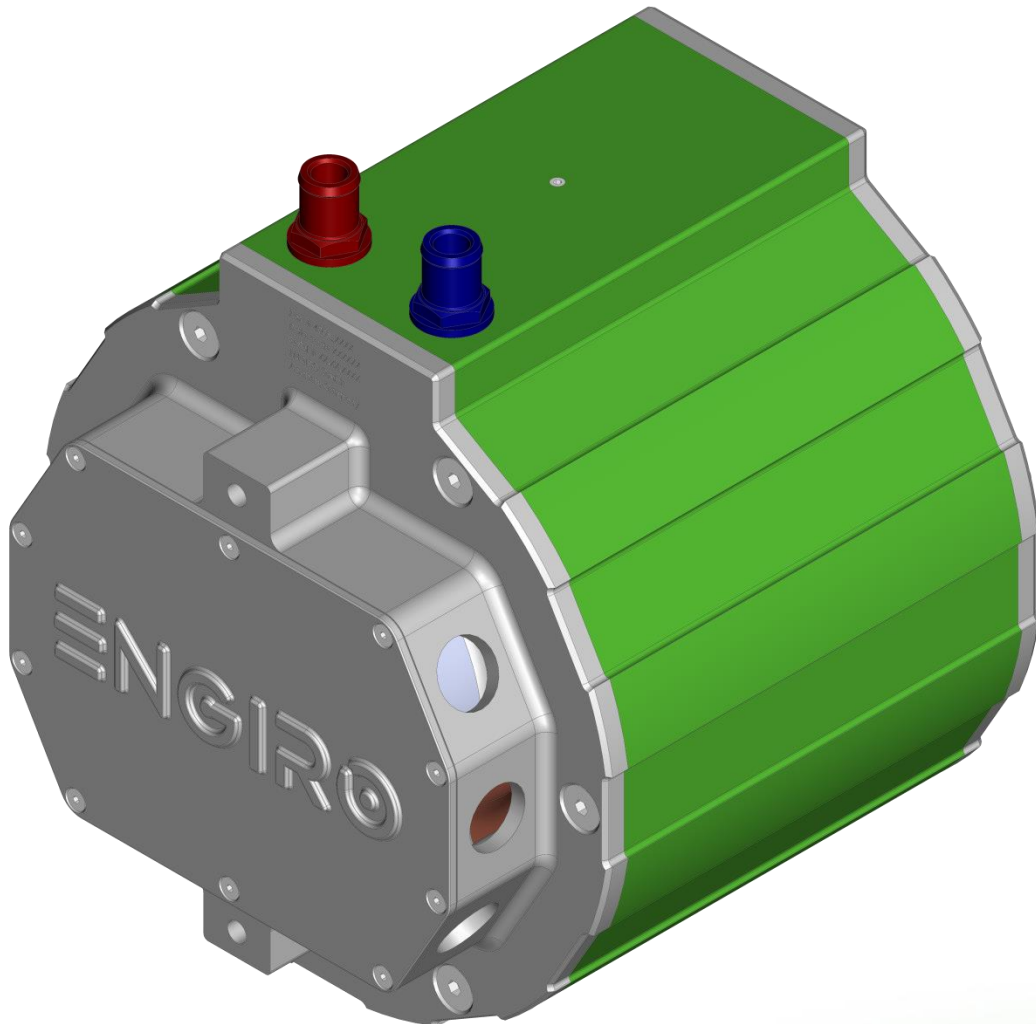

KEY FEATURES

- permanent magnet synchronous machine
- water-cooled
- high peak power for motor applications
- convincing cost-benefit ratio
- recommended voltage range from 48V to 200V
- delivery with controller possible
- various mechanical interfaces available

Section	Page
Technical Data Machine	3
Technical Drawings Machine	4
Characteristics Machine	5

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Nominal Operation (machine only, S1, cooling as specified below)

Torque	T_{nom}	34	Nm
Power	P_{nom}	12	kW
Speed	n_{nom}	3270	rpm
Phase rms-current	I_{nom}	310 ^{1,2)}	A
Battery voltage (DC)	U_{nom}	48	V
Electric frequency	$f_{el,nom}$	218	Hz
Power factor	$\cos(\varphi)$	0.69	

Maximal Values (machine only, S2, 10s, cooling as specified below)

Torque	T_{max}	94	Nm
Power	P_{max}	20	kW
Phase rms-current	I_{max}	960 ²⁾	A
Battery voltage (DC)	U_{max}	200	V
Speed	n_{max}	8000	rpm
Electric frequency	$f_{el,max}$	533	Hz

Electrical Data

Number of phases		3	
Number of pole pairs		4	
Maximal efficiency		96	%
T/I constant ($I < I_{nom}$)		0.12	Nm/A _{rms}
U/n constant (AC) at a temperature of 30°C	rms:	7.9	peak: 13.4 V/(1000rpm)
K_e constant (AC) at a temperature of 30°C	rms:	0.019	peak: 0.032 V/(rad*s ⁻¹)

Additional Data

Weight (w/o cables)		see page 4	
Rotor moment of inertia		0.0065	kg*m ²
Protection category		IP65 / IP69k	
Maximal motor temperature		140	°C
Allowed ambient temperature		-20 ... 45 ³⁾	°C
Cooling (medium, flow rate, inlet temperature, pressure)		water/glycol 50/50, 8 l/min, ≤ 45°C, ≤ 0.5 bar	
Temperature monitoring		1 x KTY84-130	
Type approval		CE, EN 60034	
Customs tariff number		8501 5230	

Connectors

Power terminals		3 x M25 cable gland	
Signal connectors		M16, 10 Pin	
Cooling connectors		2 x 3/4" / 19 mm	

¹⁾ Nominal current strongly dependent on cooling as specified below.

²⁾ The cables must not exceed a temperature of 140 °C at any time. Temperature and service life depend on the installation condition.

³⁾ other range on request


Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Available Type Variants

type number	A: flange	B: shaft	C: position sensor
205W-04013-	S: standard	S: cylindrical shaft with keyway $\varnothing 28\text{mm}$	R: resolver
	C: flange for fan without insert	H: hollow shaft with internal splines ANSI B 92.1 9T	N: none
		D: hollow shaft with internal splines ANSI B 92.1 15T	



Approximate machine weight		
flange	shaft	kg
S	S	27
S	H	26
C	D	29

**Flange S
Shaft S**

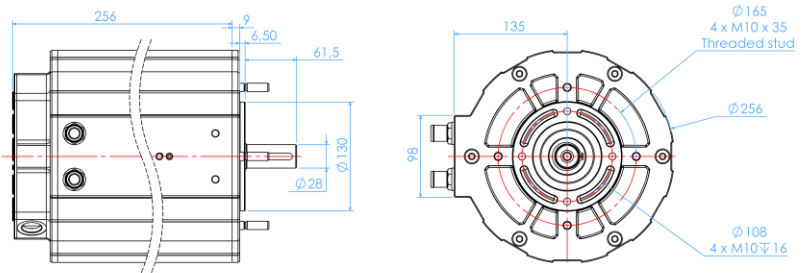


**Flange S
Shaft H**

$\varnothing 19$
Cooling connections

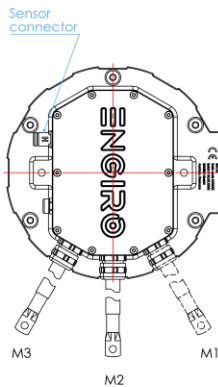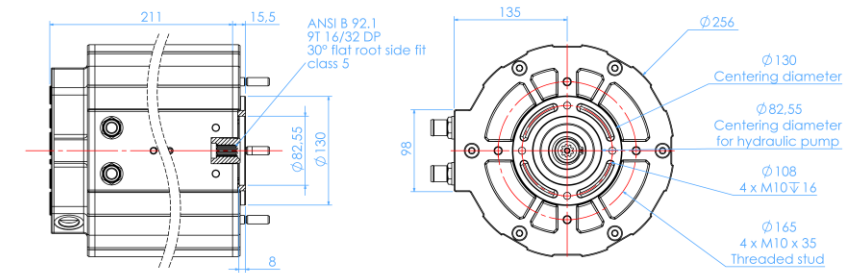

Cable glands and cables not included


**Flange C
Shaft D**

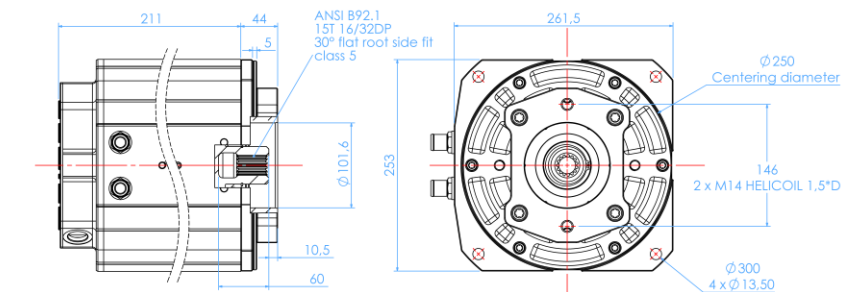

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application


(electric machine only; $U_{nom} = 48\text{ V}$; machine at 140 °C ;)

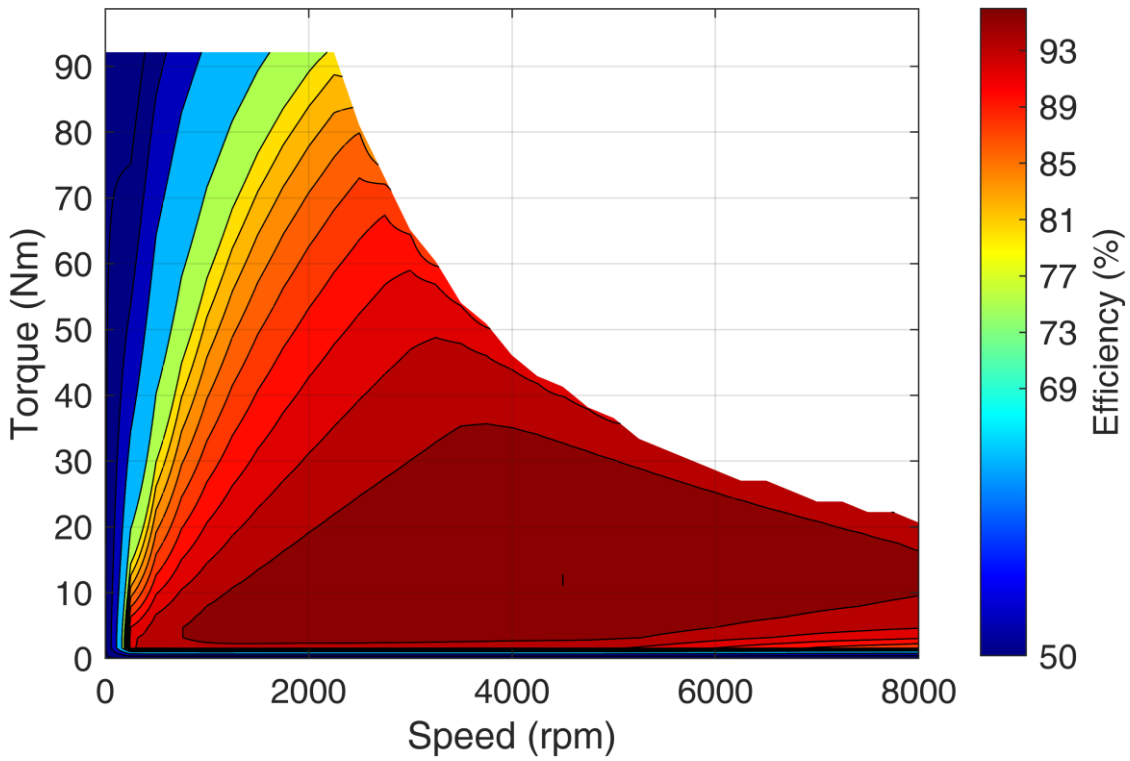

Simulated Characteristic Motor Parameters

$U_{nom} = 48\text{ V}$

solid lines: continuous; dashed lines: maximum;

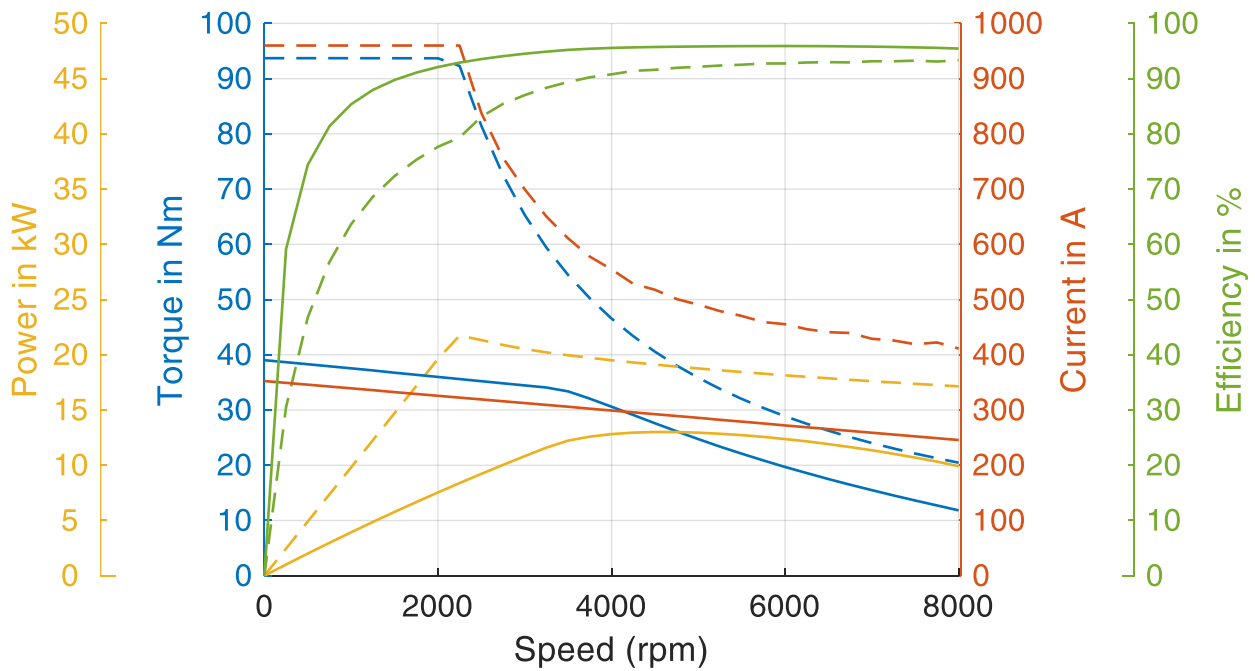

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.