


205W-12016-ABC

water-cooled motor / generator with 36 kW continuous power

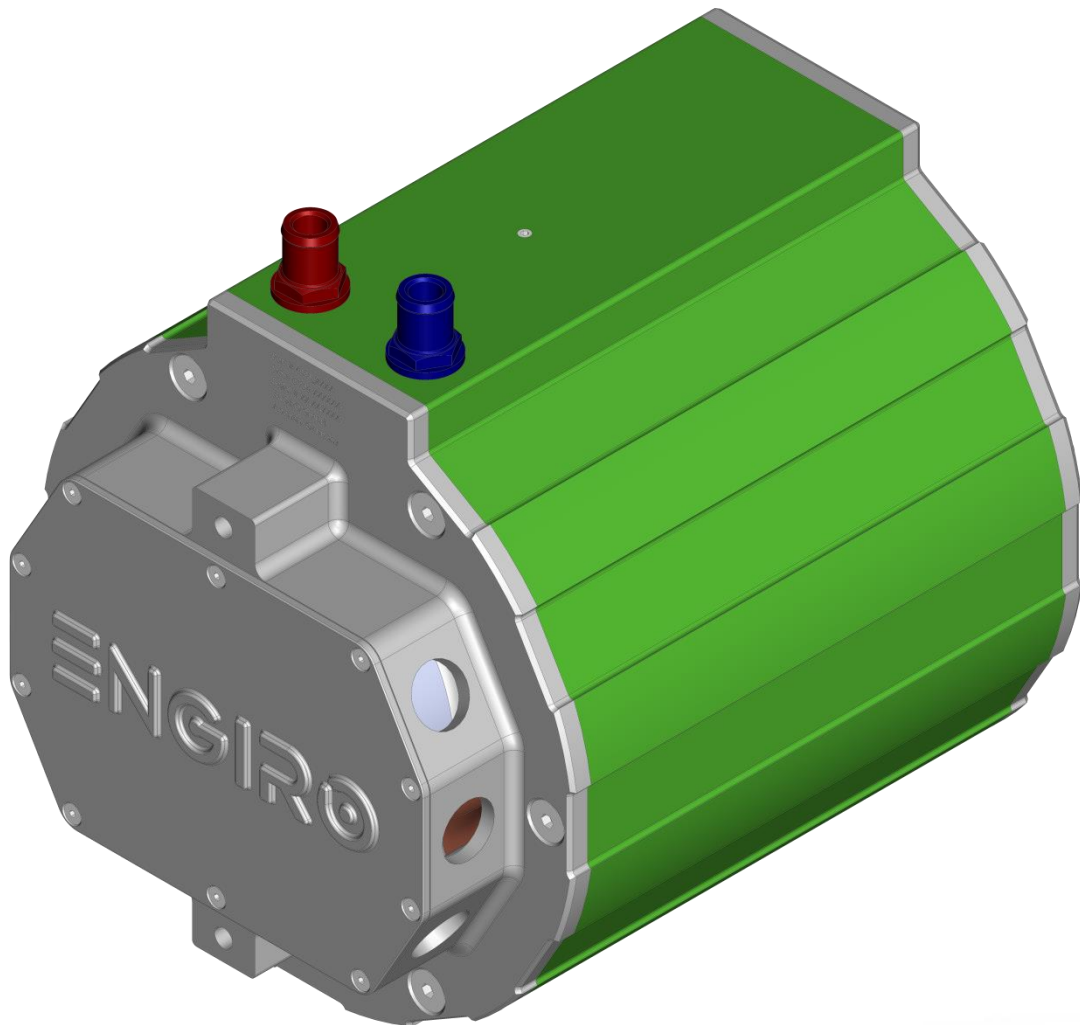

KEY FEATURES

- permanent magnet synchronous machine
- water-cooled
- high peak power for motor applications
- convincing cost-benefit ratio
- recommended voltage range from 48V to 200V
- delivery with controller possible
- various mechanical interfaces available

| Section | Page |
|----------------------------|------|
| Technical Data Machine | 3 |
| Technical Drawings Machine | 4 |
| Characteristics Machine | 5 |
| | |
| | |
| | |

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

| Nominal Operation (S1, cooling as specified below) | | | | |
|--|-----------------|------------|--|--------------------------|
| Torque | T_{nom} | | 134 | Nm |
| Power | P_{nom} | | 36 | kW |
| Speed | n_{nom} | | 2590 | rpm |
| Phase rms-current | I_{nom} | | 312 | A |
| Battery voltage (DC) | U_{nom} | | 140 | V |
| Electric frequency | $f_{el, nom}$ | | 172 | Hz |
| Power factor | $\cos(\varphi)$ | | 0.69 | |
| Maximal Values (S2, 10s, cooling as specified below) | | | | |
| Torque | T_{max} | | 284 | Nm |
| Power | P_{max} | | 66 | kW |
| Phase rms-current | I_{max} | | 782 | A |
| Battery voltage (DC) | U_{max} | | 280 | V |
| Speed | n_{max} | | 6760 | rpm |
| Electric frequency | $f_{el, max}$ | | 451 | Hz |
| Electrical Data | | | | |
| Number of phases | | | 3 | |
| Number of pole pairs | | | 4 | |
| Maximal efficiency | | | >96 | % |
| T/I constant ($I < I_{nom}$) | | | 0.43 | Nm/A _{rms} |
| U/n constant (AC) | | rms: 29.3 | peak: 41.4 | V/(1000rpm) |
| K_e constant (AC) | | rms: 0.070 | peak: 0.099 | V/(rad*s ⁻¹) |
| Additional Data | | | | |
| Weight (w/o cables) | | | see page 4 | |
| Rotor moment of inertia | | | 0.0182 | kg*m ² |
| Protection category | | | IP65 / IP69k | |
| Maximal motor temperature | | | 140 | °C |
| Allowed ambient temperature | | | -20 ... 45 ¹⁾ | °C |
| Cooling (medium, flow rate, inlet temperature, pressure) | | | water/glycol 50/50, 6 l/min, ≤ 45°C, ≤ 0.5 bar | |
| Temperature monitoring | | | 1 x KTY84-130 | |
| Type approval | | | CE, EN 60034 | |
| Customs tariff number | | | 8501 5230 | |
| Connectors | | | | |
| Power terminals | | | 3 x M25 cable gland | |
| Signal connectors | | | M16, 10 Pin | |
| Cooling connectors | | | 2 x 3/4" / 19 mm | |

¹⁾ other range on request


Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Available Type Variants


| type number | A: flange | B: shaft | C: position sensor |
|-------------|----------------------------------|---|--------------------|
| 205W-12016- | S: standard | S: cylindrical shaft with keyway Ø28mm | R: resolver |
| | B: flange for fan motor | H: hollow shaft with internal splines ANSI B 92.1 | E: sin/cos encoder |
| | C: flange for fan without insert | E: external splines, DIN 5480 | N: none |
| | | C: cylindrical shaft with keyway Ø35mm | |
| | | D: hollow shaft with internal splines ANSI B 92.1 | |

Dimension „A“ = 292 mm


| Approximate machine weight | | |
|----------------------------|-------|----|
| flange | shaft | kg |
| S | S | 45 |
| S | E | 45 |
| S | H | 44 |
| C | D | 47 |
| B | C | 49 |

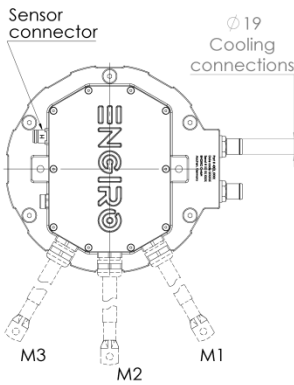


Flange S
Shaft S

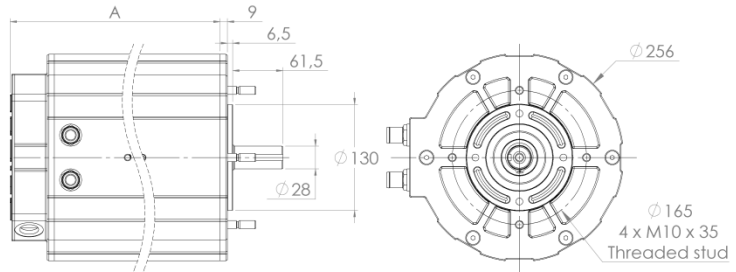


Flange S
Shaft E

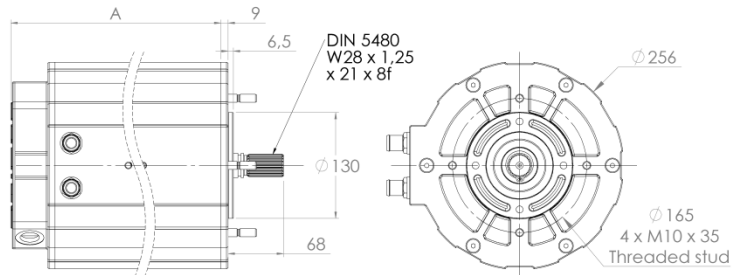


Flange S
Shaft H

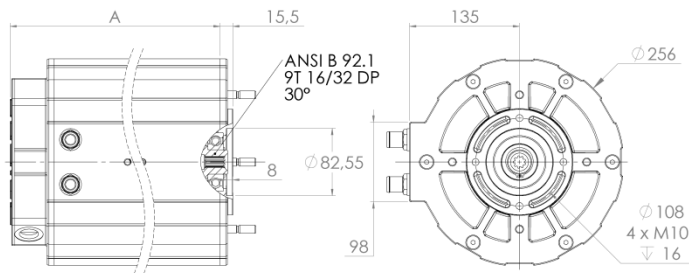

Flange C
Shaft D

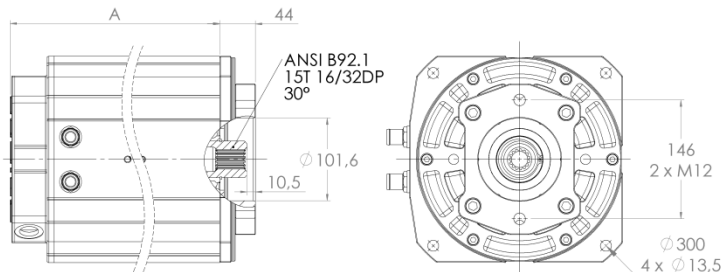


Flange B
Shaft C

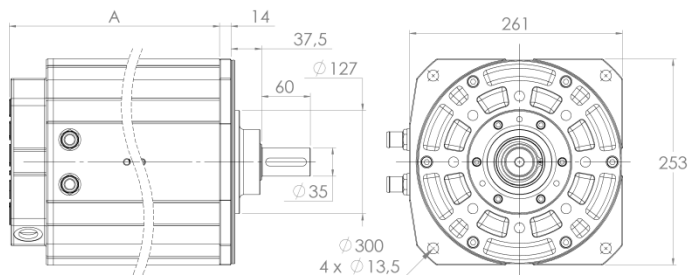

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application


(electric machine only; $U_{nom} = 140\text{ V}$; machine at 100 °C ;)

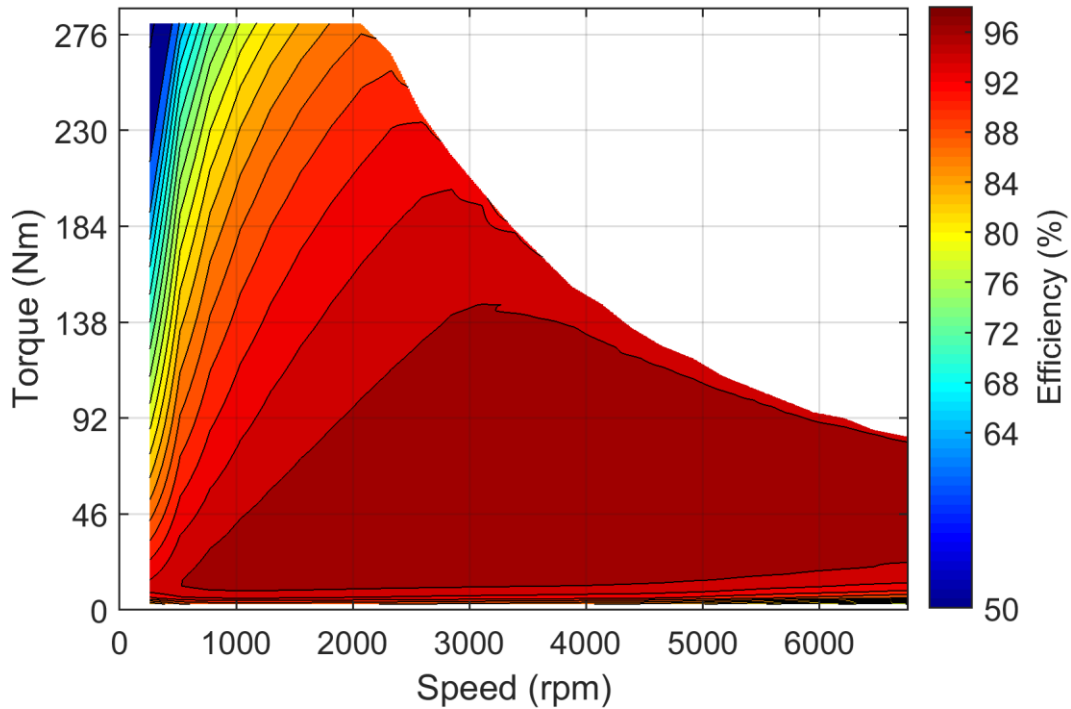

Simulated Characteristic Motor Parameters

$U_{nom} = 140\text{ V}$

solid lines: continuous; dashed lines: maximum;
(jitter is caused by numerical inaccuracies in the simulation software)

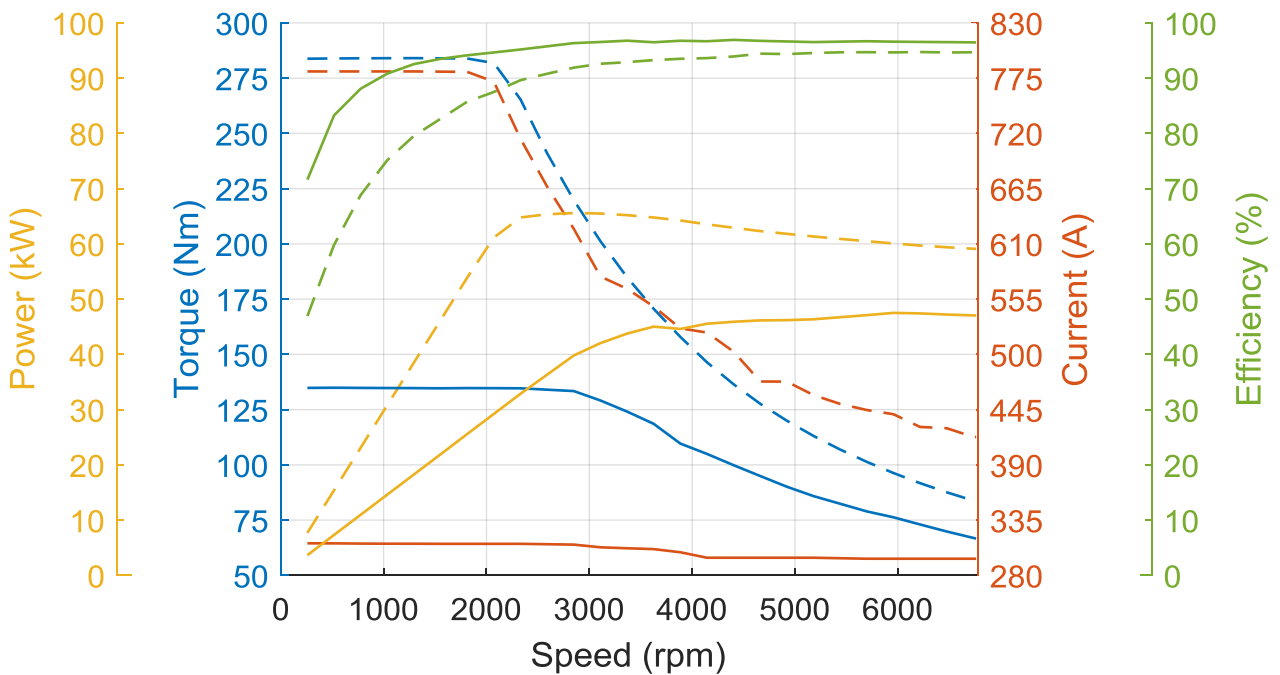

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.