


# 260W-25018-ABC

water-cooled motor/generator with up to 163 kW power

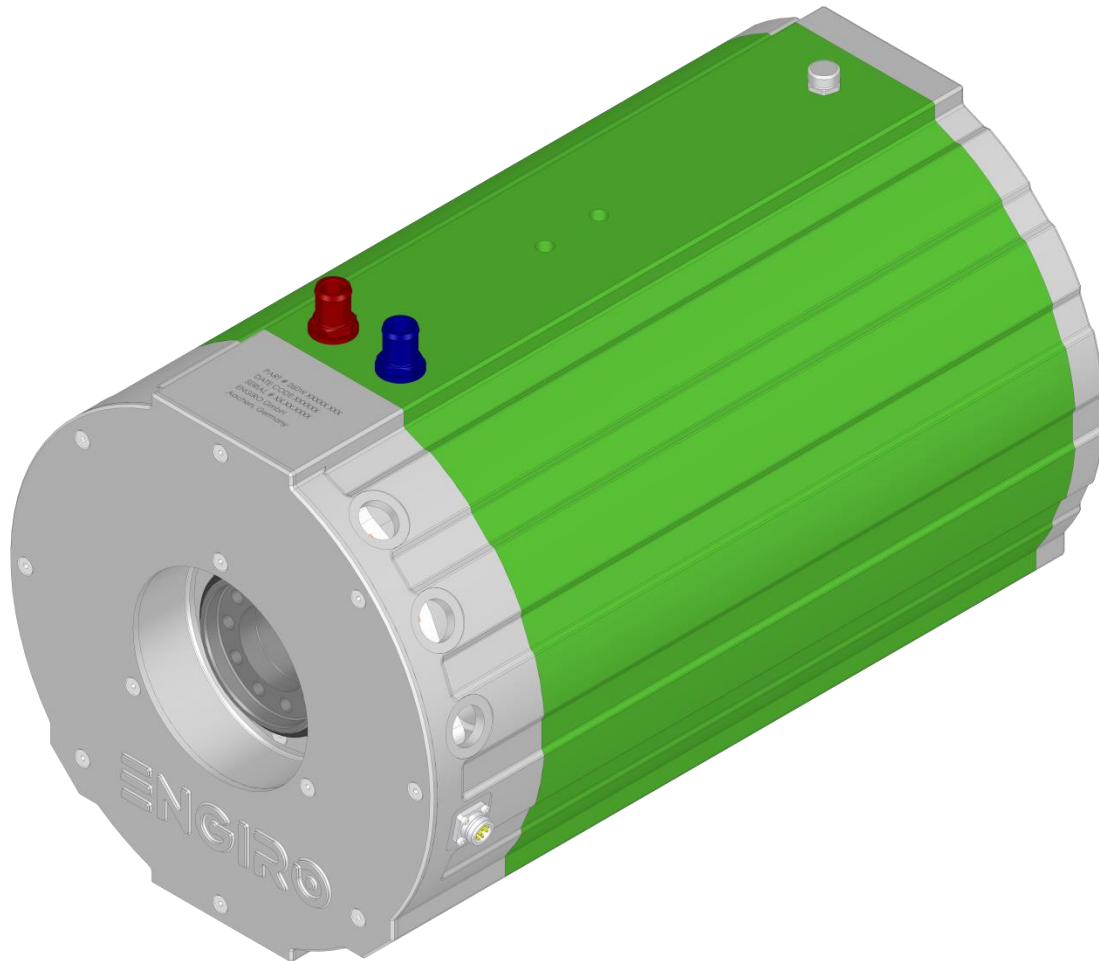

## KEY FEATURES

- permanent magnet synchronous machine
- water-cooled
- high peak power for motor applications
- convincing cost-benefit ratio
- recommended voltage range from 300V to 850V
- delivery with controller possible
- Double shaft end with screw flange

Section	Page
Technical Data Machine	3
Technical Drawings Machine	4
Characteristics Machine – 400V	5
Characteristics Machine – 700V	6

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

## Nominal Operation (S2, 60min, cooling as specified below)

Torque	$T_{nom}$	778	780	Nm
Power	$P_{nom}$	102	163	kW
Speed	$n_{nom}$	1250	2000	rpm
Phase rms-current	$I_{nom}$	256 <sup>1,2)</sup>	252 <sup>1,2)</sup>	A
Battery voltage (DC)	$U_{nom}$	400	700	V
Electric frequency	$f_{el,nom}$	104	167	Hz
Power factor	$\cos(\varphi)$	0.73	0.73	

## Maximal Values (S2, 10s, cooling as specified below)

Torque	$T_{max}$	1386	1386	Nm
Power	$P_{max}$	145	254	kW
Phase rms-current	$I_{max}$	547 <sup>2)</sup>	547 <sup>2)</sup>	A
Battery voltage (DC)	$U_{max}$		850	V
Speed	$n_{max}$		3740	rpm
Electric frequency	$f_{el,max}$		312	Hz

## Electrical Data

Number of phases			3	
Number of pole pairs			5	
Maximal efficiency			96	%
$T/I$ constant ( $I < I_{nom}$ )			3.16	Nm/A <sub>rms</sub>
$U/n$ constant (AC) at a temperature of 30°C	rms:	188.9	peak:	292.8 V/(1000rpm)
$K_e$ constant (AC) at a temperature of 30°C	rms:	0.361	peak:	0.559 V/(rad*s <sup>-1</sup> )

## Additional Data

Weight (w/o cables)		137	kg
Rotor moment of inertia		0.158	kg*m <sup>2</sup>
Protection category		IP6K9K <sup>3)</sup>	
Maximal motor temperature		140	°C
Allowed ambient temperature		-20 ... 45 <sup>4)</sup>	°C
Cooling (medium, flow rate, inlet temperature, pressure)		water/glycol 50/50, 24 l/min, ≤ 45°C, ≤ 0.5 bar	
Temperature monitoring		1 x KTY84-130	
Type approval		CE, EN 60034	
Customs tariff number		8501 5381	

## Connectors

Power terminals		3 x M25 cable gland	
Signal connectors		M16, 10 Pin	
Cooling connectors		2 x 3/4" / 19 mm	

<sup>1)</sup> Nominal current strongly dependent on cooling as specified below.

<sup>2)</sup> The cables must not exceed a temperature of 140 °C at any time. Temperature and service life depend on the installation condition.


<sup>3)</sup> Please note that the IP6K9K rating is only valid if the machine is installed with suitable cable glands and an appropriate sealed interface at the drive side of the motor (flange and/or shaft). Please contact ENGIRO for further questions. / Only applies to SFR Variant /

<sup>4)</sup> other range on request

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

## Available Type Variants


type number	A: flange	B: shaft	C: position sensor
260W-25018-	S: standard	F: hollow shaft with two screw flanges	R: resolver
	D: double		N: none

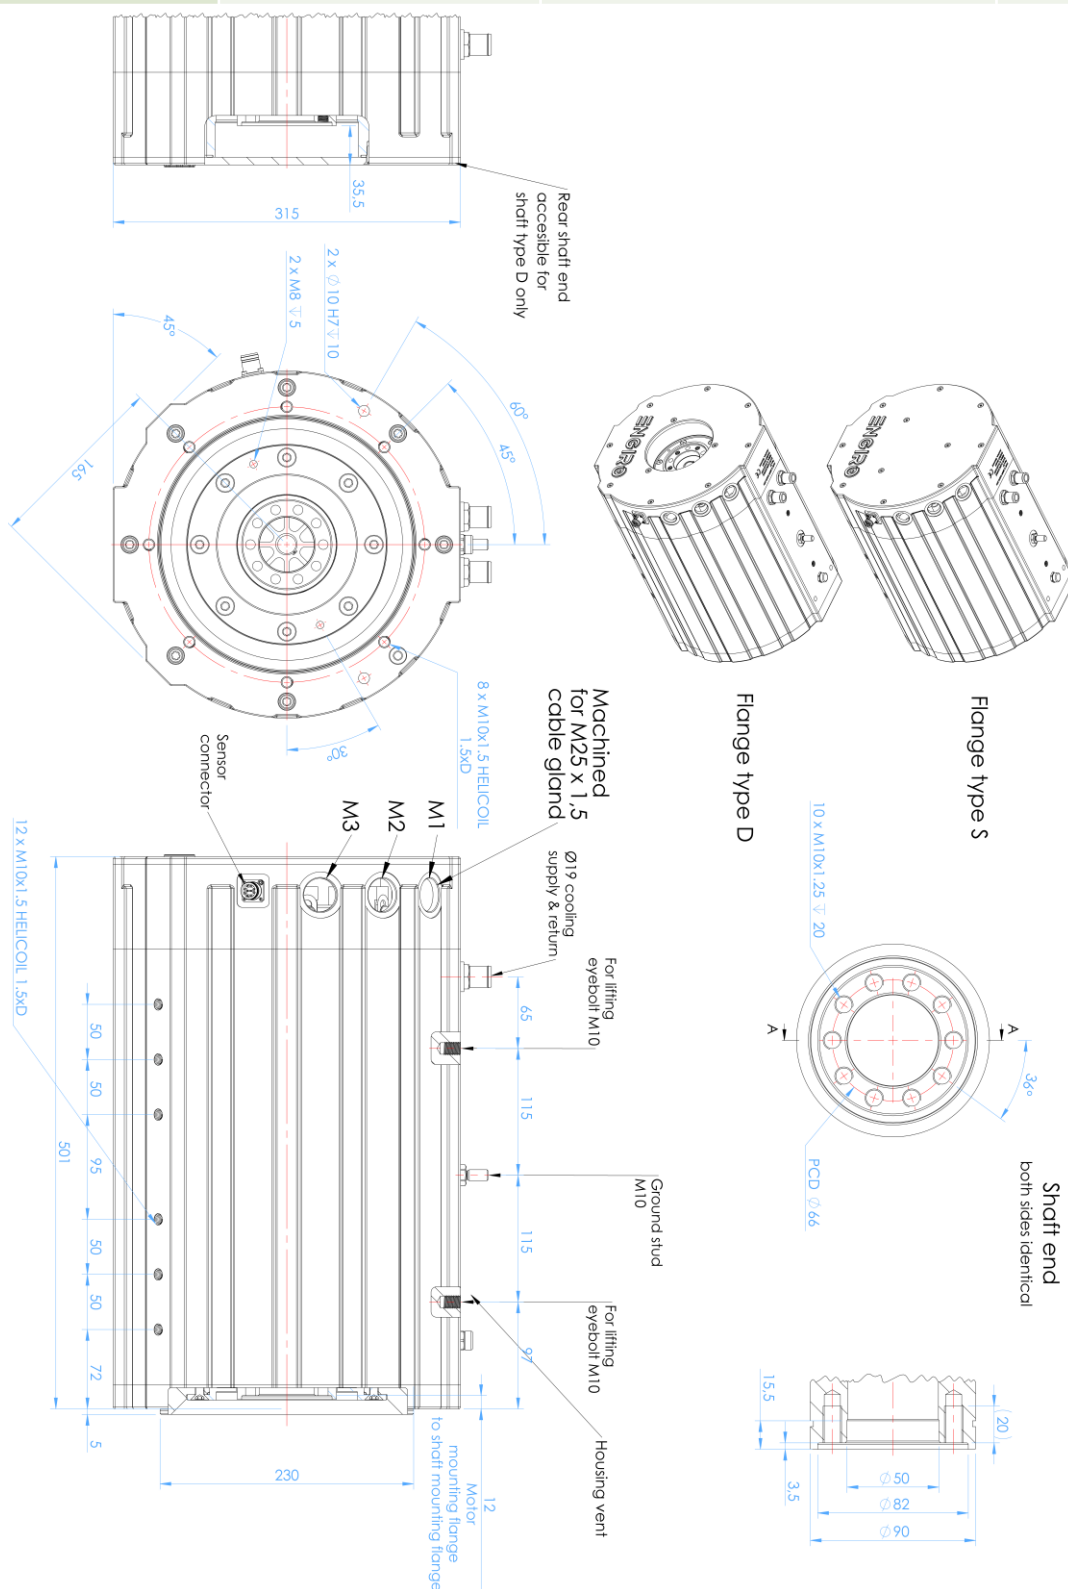

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

### Simulated Efficiency of Motor Application


(electric machine only;  $U_{\text{nom}} = 400 \text{ V}$ ; machine at  $140^\circ\text{C}$ ;) )

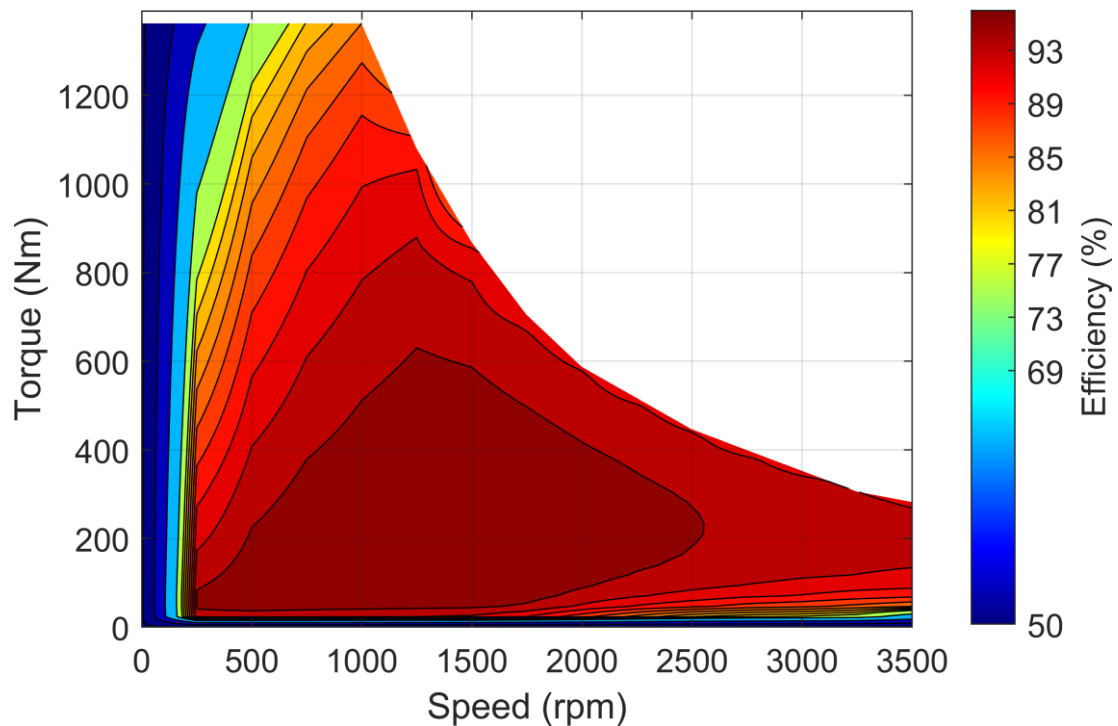

### Simulated Characteristic Motor Parameters

$U_{\text{nom}} = 400 \text{ V}$


solid lines: S2, 60 min; dashed lines: maximum;

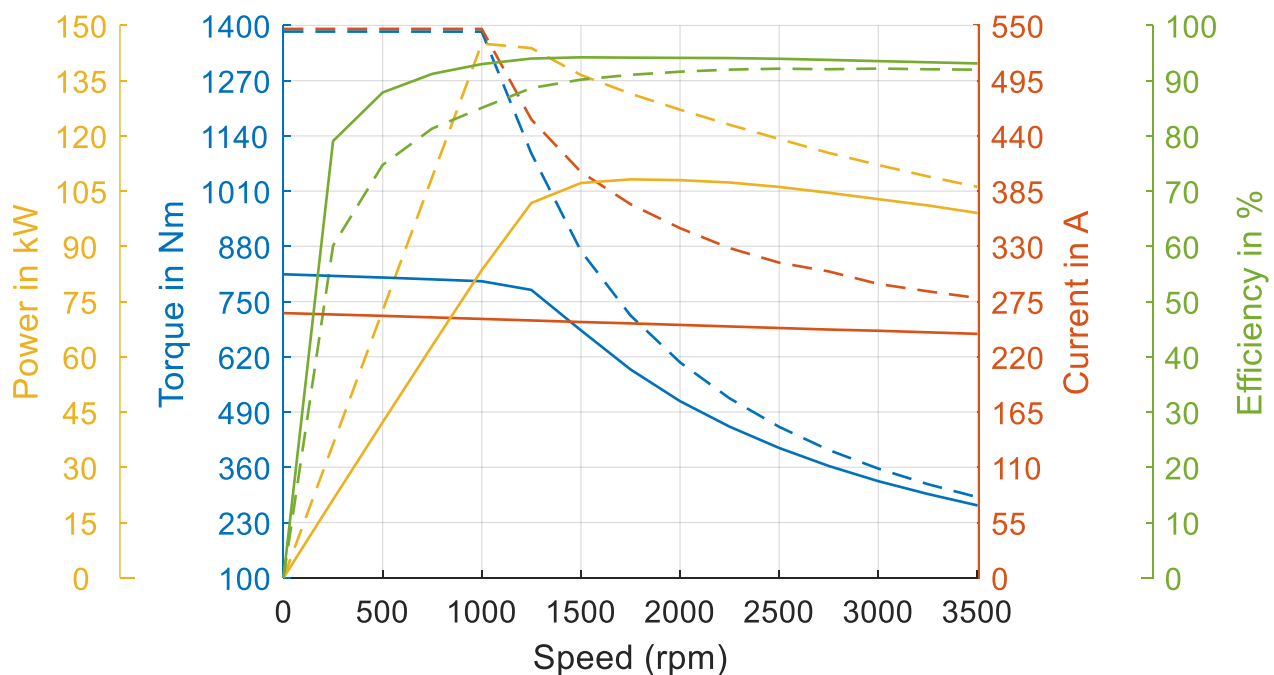

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

### Simulated Efficiency of Motor Application


(electric machine only;  $U_{\text{nom}} = 700 \text{ V}$ ; machine at  $140^\circ\text{C}$ ;) )

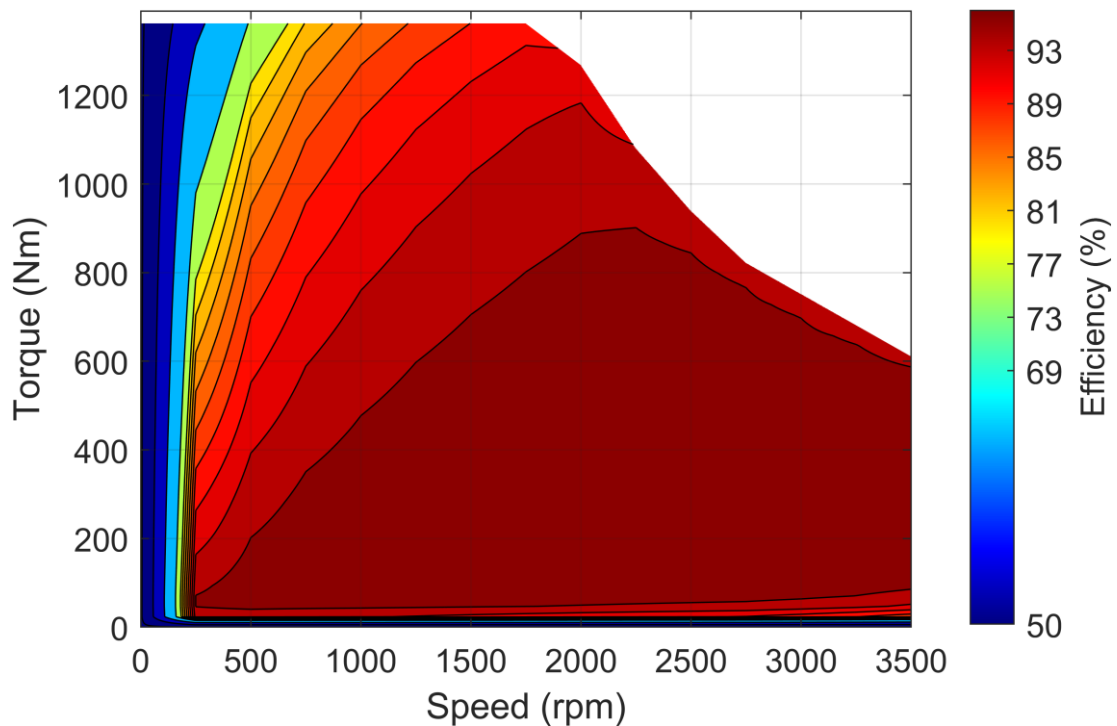

### Simulated Characteristic Motor Parameters

$U_{\text{nom}} = 700 \text{ V}$

solid lines: S2, 60 min; dashed lines: maximum;

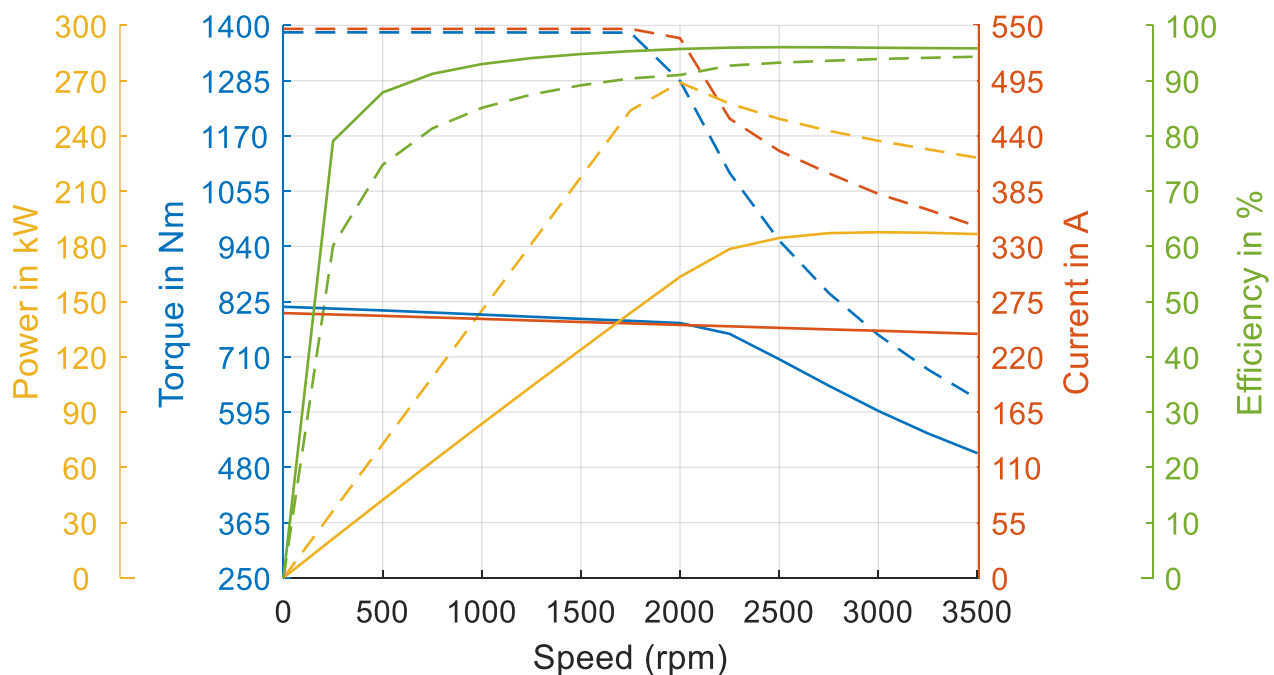

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.